



HELIOS

LED Highbay 53W - 400W
6320 - 45468 Lumens



LED Lighting
Fibre Optic Lighting
Lighting Control
Electronic Engineers



HELIOS

LED Highbay 53w - 400w
6320 - 45468 Lumens




Professional LED Highbay with impressive lumen output

A well established member of the Digilin industrial range, the HELIOS series is equally efficient in industrial, warehousing and commercial projects. Ultra reliability using Philips Luxeon & Xitanium technology, the Helios range boasts superior quality and outstanding performance.

Specifications


Family	Helios								Helios Pro									
Version	HEL-53	HEL-80	HEL-100	HEL-130	HEL-160	HEL-200	HEL-250	HEL-300	HEP-53	HEP-80	HEP-100	HEP-130	HEP-160	HEP-200	HEP-250	HEP-300	HEP-350	HEP-400
Lumens	7420	11200	14000	18200	22400	28000	35000	42000	6320	9542	11367	14777	18187	22734	28417	34100	39785	45468
Connected Load	53w	80w	100w	130w	160w	200w	250w	300w	53w	80w	100w	130w	160w	200w	250w	300w	350w	400w
Dimensions (no reflector)	206W x 206W X 201H	206W X 211H	283W X 239H	283W X 239H	283W X 254H	283W X 296H	283W X 341H	283W X 341H	206W x 206W x 201H	206W x 211H	283W x 239H	283W x 239H	283W x 254H	283W x 296H	283W x 341H	283W x 341H	283W x 371H	283W x 371H
Weight	2.5kg	3kg	3kg	4kg	5.5kg	7.5kg	9kg	9.5kg	2.5kg	3kg	3kg	4kg	5.5kg	7.5kg	9kg	9.5kg	11kg	11kg
Performance	70% Lumen Maintenance @ 50,000 Hours								98% Lumen Maintenance @ 50,000 Hours									
Colour Temp									3000K, 4000K, 5000K, 5700K									
Typical CRI									70 (80 Available on Request)									
Environment									IP40 (IP65 Available Upon Request)									
Construction									Anodized Aluminium Frame & Heat Sink. Aluminium or polycarbonate reflector									
Power Supply									220-240V AC									
Power Factor									>0.95									
Operating Temp									-40°C - +55°C									
Dimming									Non Dimming Standard (1-10V & DALI Available)									
Reflector Options	45° Polycarbonate (Mini)			45° Polycarbonate			45° Aluminium			90° Aluminium			120° Aluminium					
Suitable For	53w - 80w			100w - 400w			100w - 400w			100w - 400w			100w - 400w					
Reflector Dimensions	310mm dia x 185mm high			420mm dia x 252mm high			420mm dia x 252mm high			500mm dia x 188mm high			500mm dia x 138mm high					

Dimensions

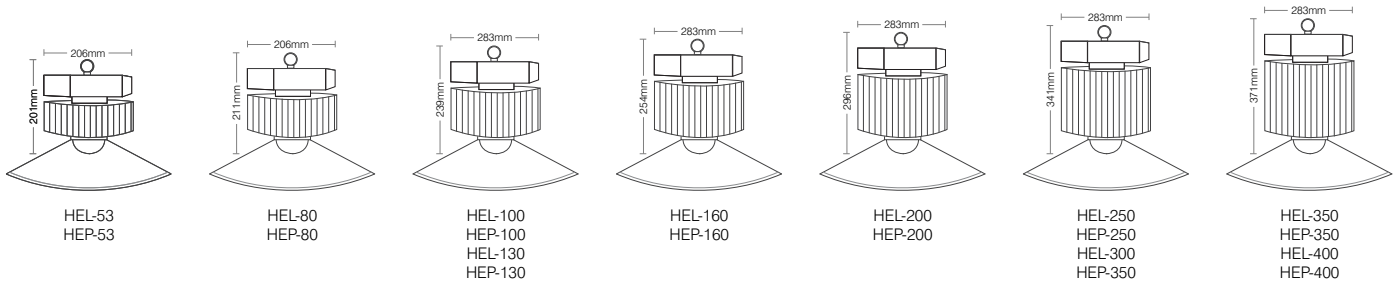

Ordering Codes

QUICK SPEC				OPTIONS	
HEL	250	W57	O		
Family	Version	Colour Temp	Reflector	Dimming	
HEL Helios	53 53w	W30 3000K	45P 45 Degree Polycarb	Default (Non Dimming)	
HEP Helios Pro	80 80w	W40 4000K	45A 45 Degree Aluminium	ANA 1-10V Dimming	
	100 100w	W50 5000K	90A 90 Degree Aluminium	DALI DALI Dimming	
	130 130w	W57 5700K	120A 120 Degree Aluminium		
	160 160w				
	200 200w				
	250 250w				
	300 300w				
	350 350w				
	400 400w				

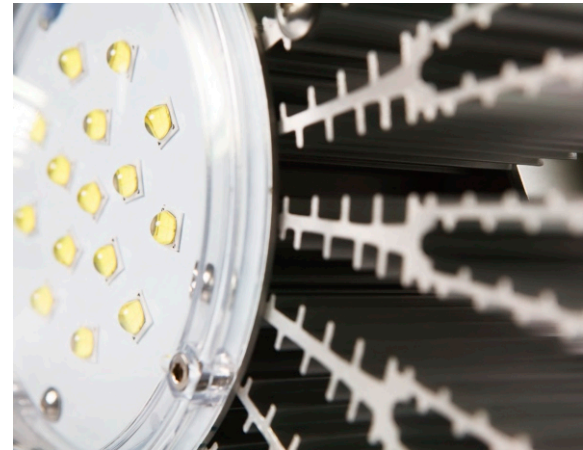

NOTE: Helios range is manufactured to Digilin specifications by an international partner



LED Lighting
Fibre Optic Lighting
Lighting Control
Electronic Engineers



1800 950 888
+617 3899 1267
info@digilin.com.au
www.digilin.com.au