

PowerFlex

High Output LED Strip

Specifications & Installation

Guide



LED Lighting and Control
Designed and Manufactured in Australia

©2016 Digilin Australia.
Document Rev: 5.2 - 2 November 2016
Product specifications are subject to change without notice.

DIGILIN

Table Of Contents

Safety Notes	2
Specifications	2
Inputs	2
Optical.....	2
Dimensions	3
Installation	3
Mounting	3
Wiring	3
Maintenance	3
Wiring Diagram	4

Safety Notes

- Do not press On LEDs when installing
- Do not overflex strips
- Installation should only be performed by a qualified professional
- Install in accordance with all appropriate wiring standards
- Never connect a LED fitting to a driver that is powered. Doing so may result in damage to the LED.
- Always make sure the output voltage range and output current of the LED driver match the requirements of the LED fitting. Failure to do so may result in damage both the driver and fitting.

Specifications


Inputs

			Units
Voltage	Nominal	24	VDC
	Min	23	
	Absolute Max	25	
Drive Current		620	mA/m
Watts		14.88	W/m
Maximum run from power connection		4	m

Optical

	White		Units
Order Code	W30	W40	
Beam Angle	110		°
Colour Temperature	3000	4000	K
Typical Lumens	1505	1595	lm/m

Dimensions

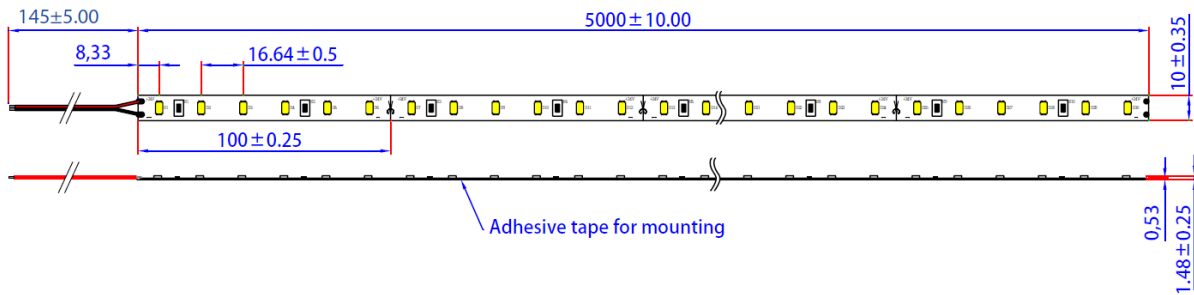

PowerFlex LED Strip is supplied in 5m Reels, LED spacing 16.64mm
Each reel has a total of qty 50 x 100mm segments
Note 100mm segment is minimum usable length.

Installation

Mounting

- Do not attempt to make sharp bends with the strip. Right angles should be achieved by cutting the strip and joining with wires.
- Over-flexing the strip may cause it to snap.
- Do not press on the LEDs when installing. Doing so may damage the LEDs.
- Clean the surface to be mounted to with isopropyl alcohol first.
- Do not install where water or high humidity may be present without further protection. Note that the Javelin extrusion is NOT sealed.
- Do not mount with the components or board touching any flammable surfaces.
- Do not install under mechanical stress
- Allow for expansion due to changes in temperature.
- Please be aware that while the system has a very long operational life, faults may still occur and provision needs to be made for maintenance.

Wiring

- No continuous run of strips should exceed the specified maximum run value without additional power feeds. Refer to the wiring diagram.
- Only join strips powered by the same supply

Maintenance

- Strips normally require no maintenance except for light cleaning
- Isolate from power before accessing
- Visually inspect strips at the time for any obvious faults
- The strips may be dusted with a non-conductive brush. No fluids should be used
- If this procedure does not remove contaminants, please contact Digilin for further advice.

Wiring Diagram

