

STADIUM II

LED Flood 105W - 520W
11832 Lumens - 59160 Lumens



STADIUM II

LED Flood 105W - 520W

11832 Lumens - 59160 Lumens

DIGILIN

Professional LED floodlight with class leading lumen output

Highest output of its type, this fixture is equally efficient in stadium, playing field, industrial and commercial projects.

Using Philips Lumileds technology, the Stadium II range boasts superior quality and performance.




SPECIFICATIONS

Model	ST105	ST155	ST210	ST260	ST310	ST420	ST520
Colours	3000K, 4000K, 5000K, 5700K						
Luminaire Lumens	11832	17748	23664	29580	35496	47328	59160
Typical CRI	70 (80 & 90 CRI Available)						
Beam Options	15°, 30°, 60°, 135° x 60°						
Performance	70% Lumen Maintenance @ 50,000 Hrs (L70)						
Luminaire Power	94w	144w	190w	235w	282w	380w	470w
Connected Load	105w	155w	210w	260w	210w	420w	520w
IP Rating	IP65						
Material & Finish	Anodized Aluminium Frame, Integrated Heat Sink, High Efficiency PC Lens						
Power Supply	220-240V AC						
Power Factor	> 0.95						
Operating Temp	-40°C to +55°C						
Weight	8kg	10kg	13kg	14kg	17.5kg	21kg	23kg
Dimensions	485mm x 324mm x 110mm	485mm x 410mm x 110mm	485mm x 507mm x 110mm	485mm x 604mm x 110mm	630mm x 410mm x 110mm	630mm x 507mm x 110mm	630mm x 604mm x 110mm
Dimming	Non-Dimming, 1-10V Dimming, DALI Dimming						

NOTE- Stadium range is manufactured to Digilin specifications by an international partner

DIMENSIONS

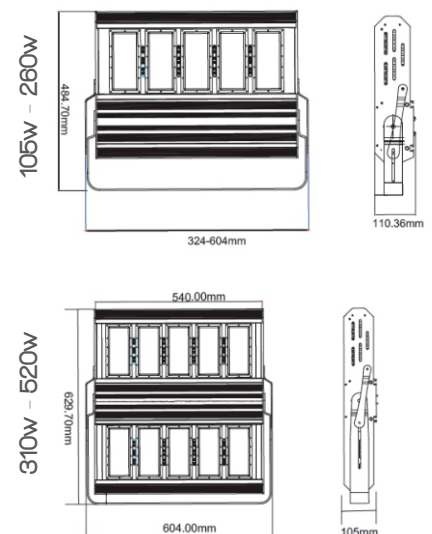

ORDERING CODES

STA-210		W57	30	-
Product Family		Colour	Beam	Dimming
STA-105	Stadium II 105w	W30 3000K	15 15°	- Non Dimming
STA-155	Stadium II 155w	W40 4000K	30 30°	1-10 1-10V Dimming
STA-210	Stadium II 210w	W50 5000K	60 60°	DALI DALI Dimming
STA-260	Stadium II 260w	W57 5700K	135 135°	
STA-310	Stadium II 310w			
STA-420	Stadium II 420w			
STA-520	Stadium II 520w			

1800 950 888

37 Oxford St Bulimba, QLD 4171

1800 982 005

www.digilin.com.au

DIGILIN

Manufactured In Australia for over 35 years