

# LATITUDE

Adjustable LED Downlight  
722 - 934 Lumens



### Compact downlight with integral heatsink.

The Latitude series delivers the exceptional performance of Digilin LED and optic technology in an adjustable housing.

This downlight utilises an integrated heatsink resulting in a smaller form factor for shallow ceiling voids.



Suitable for commercial, residential and hospitality applications, the available fixture options make this an extremely versatile luminaire.



### SPECIFICATIONS

Version	Latitude 110		Latitude 112	
Colours	Warm White	Neutral White	Warm White	Neutral White
Colour Temperature	3000K	4000K	3000K	4000K
LED Lumens @ Tj 25°C	935	973	1156	1208
Luminaire Lumens @ 64° Beam	722	756	890	934
Typical CRI	85			
MacAdams Ellipse	3 SDCM/MacAdam Steps			
Beam Option	35° & 52°			
Performance	70% Lumen Maintenance @ 50,000 Hrs (L70)			
Luminaire Power	9.2w (270mA @34.2V Nominal)		12.1w (350mA @34.5V Nominal)	
Connected Load	11.2w		14.7w	
IP Rating	IP40			
Material & Finish	Frame, Heatsink & Trim - Cast Aluminium			
Power Supply	Non Dim: LPC-52270-MD Mains Dim: LPC-52270-MD		Non Dim: LPC-52350-MD Mains Dim: LPC-52350-MD	
Power Factor	>0.9		>0.9	
Weight	570g			
Hole Cut Out	90mm Dia			

### DIMENSIONS

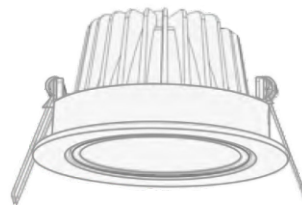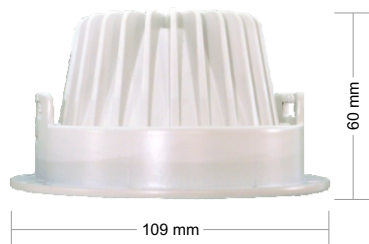

### ORDERING CODES

