



TAIPAN FLARE

IP68 LED Wall Wash Fixture
375 Lumens



LED Lighting
Fibre Optic Lighting
Lighting Control
Electronic Engineers



TAIPAN FLARE

IP68 LED Wall Wash Fixture

375 Lumens



Linear wash light effect from a point source fixture

This LED fixture uses the latest in lens technology to create an ultra wide but even beam for wall washing applications. Manufactured from marine grade stainless steel the Taipan Flare is incredibly robust.


Use with confidence in external applications where a wall wash effect is required.

Specifications

Version	LTX6-W30	LTX6-W40	LTX6-W50
Colours	Warm White	Neutral White	Cool White
Colour Temp/Wavelength	3000K	4000K	5000K
Lumens	312	366	375
Power		4.5w	
Current		700mA	
Voltage (Nominal)		6.4V	
Connected Load	DC:4.8V, AC:7.4V		
Power Supply (Dimming)	700mA Constant Current Drive @ 3V		
Power Supply(Non Dim)	9-28V AC/DC 50/60Hz		
Dimming Options	Mains, DMX, DALI, Super Smooth DALI		
Beam Options	Ultra Wide Wall Wash Optics 120° x 5°		
Typical CRI	85 (90 & 95 Available)		
Binning	ANSI Compatible Binning		
Performance	90% Lumen Maintenance (8.5K) @ 51,400 Hours		

Build Type	Exterior	Interior
Construction Material	Machined 316 Stainless Steel	Machined Aluminium
IP Rating	IP68	IP65
IK Rating	IK10	IK07
Weight	640g	460g
Mounting	Recessed into pipe/conduit	

Dimensions

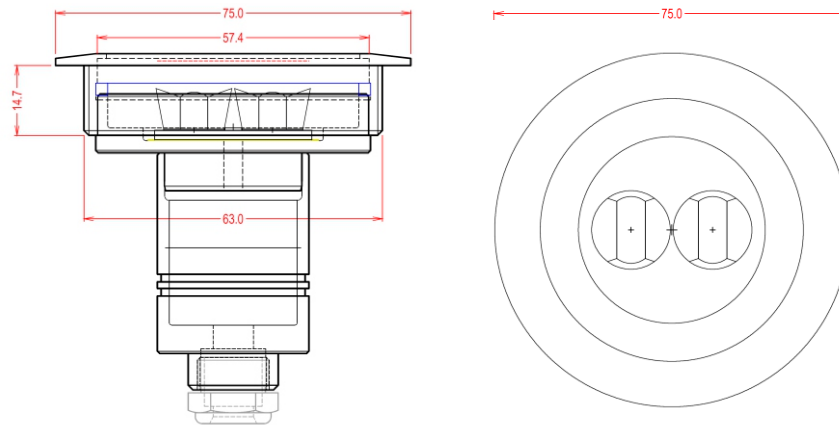

Ordering Codes

QUICK SPEC				OPTIONS	
LTE3	-	W30	UWW	-	-
Family	Dimming	Colour/CCT	Beam Angle	Cable Length	CRI
LTE6 Taipan Flare Exterior LT16 Taipan Flare Interior	- Non Dimming (Default) PWM Dimming (Via PWM)	W30 3000K W40 4000K W60 6000K WXX Custom (Specify) R Red G Green B Blue	UWW Ultra Wide Wall Wash	- Default (1m) 5 5m 10 10m 15 15m 20 20m XX Custom (Specify)	- Default (85+) 90 90+CRI 95 95+CRI XX Custom

NOTE: Taipan Flare range is proudly engineered by Digilin and manufactured in our Brisbane facility



LED Lighting
Fibre Optic Lighting
Lighting Control
Electronic Engineers



1800 950 888
+617 3899 1267
info@digilin.com.au
www.digilin.com.au