

# ANALOGUE RECEIVER

4 Channel 0-10V to PWM



# ANALOGUE RECEIVER

4 Channel 0-10V TO PWM

DIGILIN

## 0-10V Receiver with 4 Channel PWM Output

The LAC-PWM-4 provides an interface between control systems using 0-10V dimming signals and LED strips and fittings. It can be used to directly drive up to 15A of LED loads over 4 channels.


The LAC-PWM-4 uses Digilins smooth transition software to ensure dimming curves are consistent with no flicker, stepping or snapping.



## SPECIFICATIONS

Supply Voltage	12VDC - 24VDC
Dimming Control	0-10V
Dimming Range	0-100%
10V Current Draw	0.33 mA
Maximum Input Voltage	15VDC
Outputs	4 Channels Low Side PWM
Current Per Channel	5A
Max Total Output Current	15A
IP Rating	IP20
Dimensions	121mm x 54mm x 33mm
Weight	90g

## DIMENSIONS

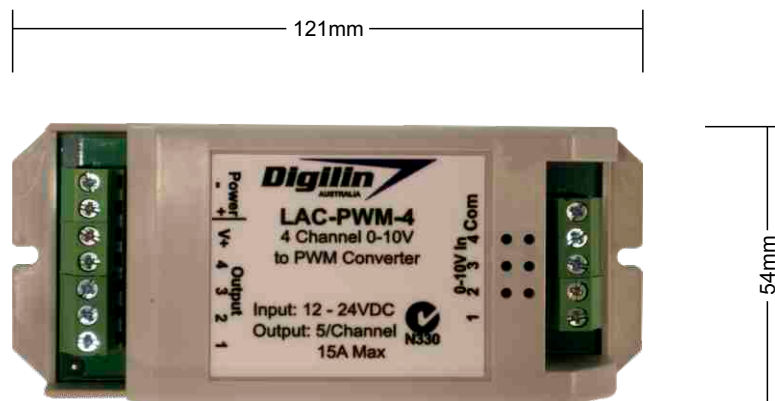

## ORDERING CODES

LAC-PWM-4