

LED STAIRNOSE 2

Illuminated Stairnosing
72 Lumens Per Metre



LED STAIRNOSE 2

Illuminated Stairnosing
72 Lumens Per Metre

DIGILIN

LED Stairnose for discreet illumination

Extruded aluminium incorporating quality LED strip lighting for downward facing illumination. Ultra low output LED's provide excellent tread identification without excessive light spill.


Available in natural anodised finish. Custom colours available by special order.



SPECIFICATIONS

Colours	Warm White
Wavelength/Colour Temp	3050K
Lumens per Metre	72
Typical CRI	80
LED Spacing	8.33mm
Cut Off Length	50mm
Beam Angle	110°
Performance	70% Lumen Maintenance @ 50,000 Hours (L70)
Voltage	24VDC
Power	Single Strip: 24VDC @50mA per metre (1.2w per metre)
Material	Extruded Aluminium
Finish	Clear Anodised (Custom colours by special order)
Max Length	2000mm
IP Rating	IP40 (IP44, IP55 & IP65 Available)
PVC Insert	Black, Grey, Light Brown, Dark Brown

ORDERING CODES

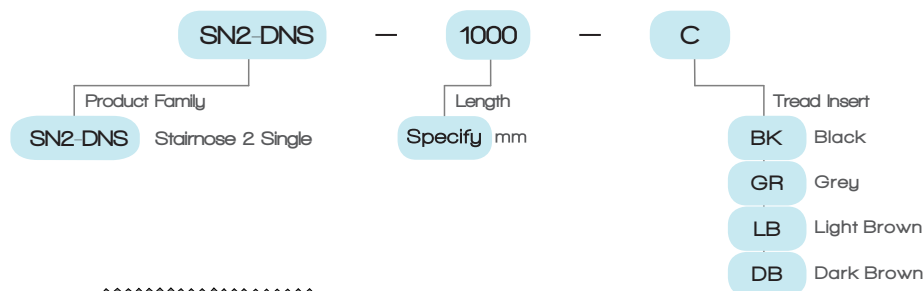

DIMENSIONS

