


LED STAIRNOSE 3

Illuminated Stairnosing
720 Lumens Per Metre

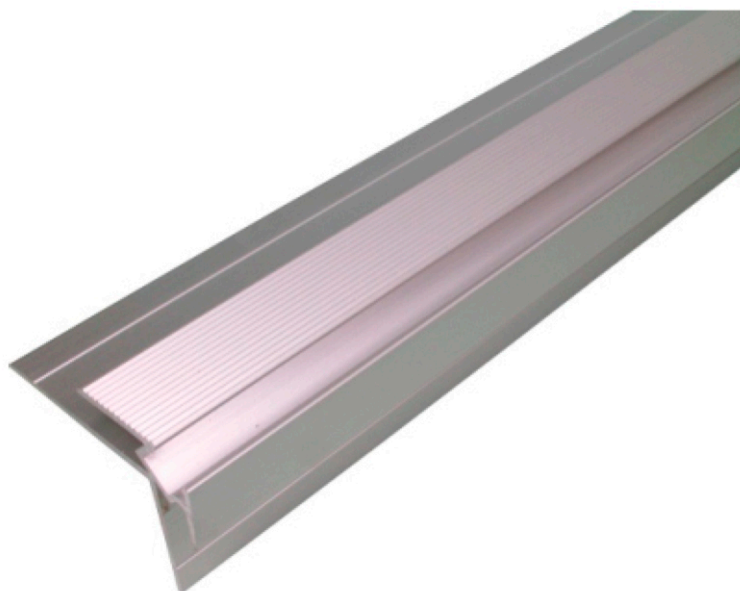

LED STAIRNOSE 3


Illuminated Stairnosing
72 Lumens Per Metre

DIGILIN

LED Stairnose for carpeted applications

Extruded aluminium incorporating quality LED strip lighting and polycarbonate lenses. Ultra low output with dot free illumination, LED Stairnose 3 is designed for tread identification without excessive light spill.


Available in natural anodised finish. Custom colours available by special order.

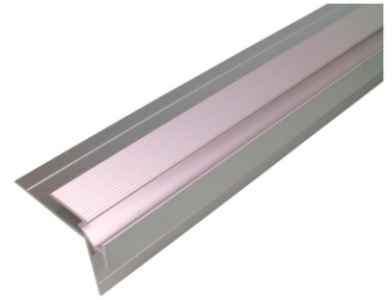

SPECIFICATIONS

Colours	Warm White					
Wavelength/Colour Temp	3050K					
Lumens per Metre	72					
Typical CRI	80					
LED Spacing	8.33mm					
Cut Off Length	50mm					
Beam Angle	110°					
Performance	70% Lumen Maintenance @ 50,000 Hours (L70)					
Voltage	24VDC					
Power	Single Strip: 24VDC @50mA per metre (1.2w per metre)					
Material	Extruded Aluminium					
Finish	Clear Anodised (Custom colours by special order)					
Max Length	2000mm					
IP Rating	IP40 (IP44, IP55 & IP65 Available)					
PVC Insert	Black, Grey, Light Brown, Dark Brown					
Covers	Opal (Dot Free)	Clear	Red	Green	Blue	Amber
LOR	61%	94%	83%	76%	72%	88%

ORDERING CODES

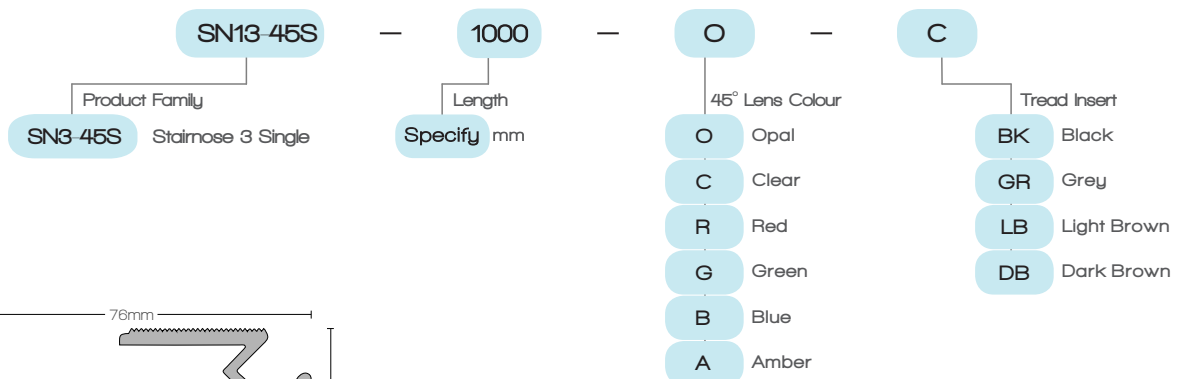

DIMENSIONS

