

POSILINK

Wireless Lighting Controller



User configurable lighting control without the cables

The PosiLink control system enables wireless control of LED devices in situations where control cabling is not physically possible.

Using a PosiTouch panel with one of the available PosiLink receivers, the system provides multi channel dimming control of general and feature lighting systems.


Available in single channel, VariWhite, RGB & RGBW modes, the PosiLink is perfect for difficult installations.



SPECIFICATIONS

| Version | Single Channel | VariWhite | RGB | RGBW |
|----------------------|----------------------|-----------|-----|------|
| Input Voltage | 24VDC | | | |
| Communications | PosiLink | | | |
| Output | Constant Voltage PWM | | | |
| Current Per Channel | 2A Per Channel | | | |
| Output Voltage | 24VDC | | | |
| PWM Frequency | 122Hz | | | |
| IP Rating | IP20 | | | |
| PosiTouch Dimensions | 75mm x 116mm x 10mm | | | |
| PosiTouch Weight | 28g | | | |
| Receiver Dimensions | 121mm x 54mm x 33mm | | | |
| Receiver Weight | 80g | | | |

DIMENSIONS

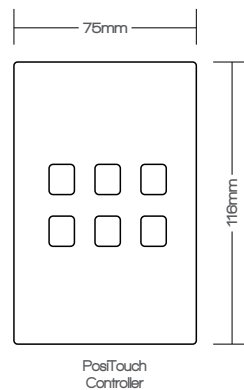

ORDERING CODES

