

# POSITOUCH

Lighting Controller



## Stylish and simple to use lighting controller

The PosiTouch lighting controller is a capacitive touch sensitive 6 button interface suitable for controlling various lighting systems. It provides simple touch to dim control, across selectable dimming levels and scenes.

The DALI version enables control of DALI light fixtures by broadcast, group or short address. The PWM version allows precise control of three independent PWM channels and the PosiLink provides standalone wireless control to multiple lighting applications.


Each button is user configurable via easy to use software, or can be pre-configured by Digilin for plug & play operation.



## SPECIFICATIONS

Version	DALI	PWM	PosiLink
Input Voltage	9.5 - 22.5 VDC	12 - 24 VDC	12 - 24 VDC
Communications	DALI (IEC62386)	PWM (3 Channel)	PosiLink Wireless
IP Rating	IP20		
Dimensions	75mm x 116mm x 10mm		
Protrusion into Wall	28.5mm		
Weight	28g		
Touch Operation	Short Press, Long Press, Release		
Additional Modes	Multi Master Mode (DALI & PosiLink)		

## DIMENSIONS

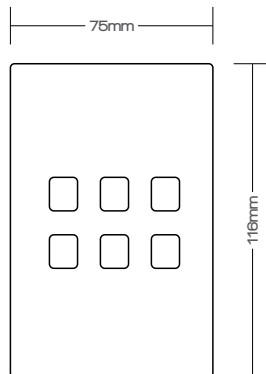

## REAR VIEW



## ORDERING CODES

