


# RORI 532


Extrusion Profile

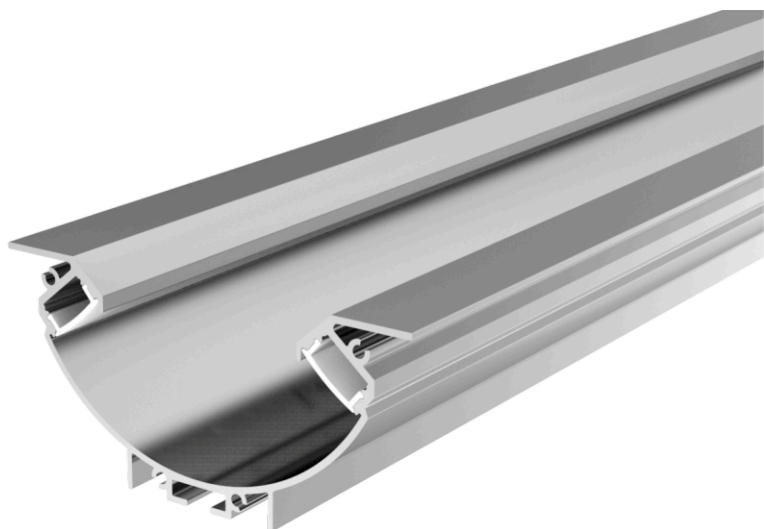

## Indirect lighting from recessed profile

Rori 532 is a unique extrusion profile enabling indirect lighting into a recessed ceiling application, from an all in one luminaire. The dual lightsources and opal diffuser provide high output and dot free illumination.


Rori 532 is suitable for recessed applications, where limited glare is a requirement. A new way to light spaces with good coverage, available with a range of strip options, Rori 532 can be selected with the appropriate colour temperature and light output.

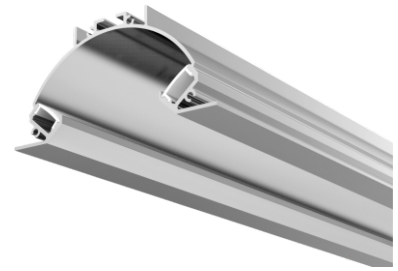

### AVAILABLE WITH

Code	Colours	Watts p/m	Lumens p/m	Code	Colours	Watts p/m	Lumens p/m
UFL	3000K, 4000K, 6000K	8.64	840	UFD	3000K, 4000K, 6000K	17.3	1680
UFC	Red, Green, Blue, Yellow	8.64	432	PFD	3000K, 4000K	30	3190
PFL	3000K, 4000K	15	1595	MFD	3000K, 4000K	48	4800
M24	3000K, 4000K	24	2400	CFD	RGB	28.8	452
CFL	RGB	14.4	226	HQD	RGB	34.6	1096
HQN	RGB	17.3	548	PTD	RGBW	34.6	1800
PTF	RGBW	17.3	900	VFD	Tunable White	28.8	2800
VFL	Tunable White	14.4	1400	APL (in dev)	3000K, 4000K	40	4000

### ORDERING CODES

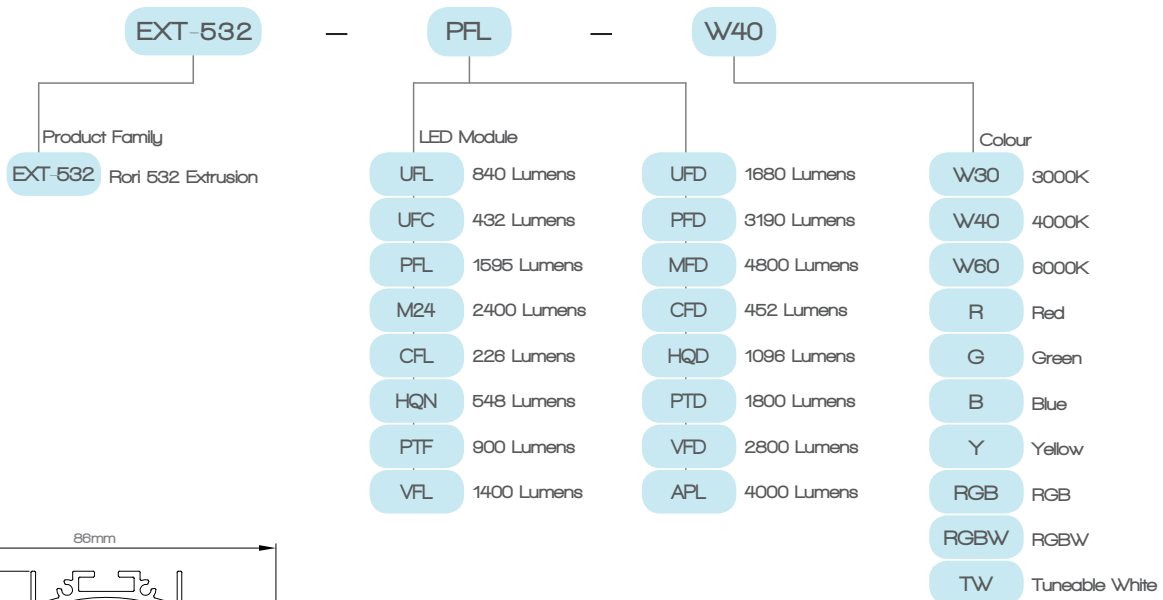

### DIMENSIONS

