



STARBURST

Fibre Optic Fixture



LED Lighting
Fibre Optic Lighting
Lighting Control
Electronic Engineers



STARBURST

Fibre Optic Fixture



Robust 316 Stainless Steel Fibre Optic Marker Light


This versatile miniature fixture is perfect for applications such as stairwells, paths, decks and decorative designs. Combined with a suitable fibre optic cable, this provides a maintenance free light point for areas that are difficult to access or service.

Can be coupled with scintillation system for twinkle effect or colour wheel for controlled colour changes.

Specifications

Version	Clear	Frosted
Beam Angle	42°	90°
Trim Diameter	25mm	
Fixture Depth	28mm	
Finish	316 Marine Grade Stainless Steel	
Window	Flat 6mm Toughened Glass	
IP Rating	IP68	
Cable Size	Up to 12 x 0.75mm	
Weight	55g	
Hole Cut Out	16mm (15.5mm Friction Fit)	

Dimensions

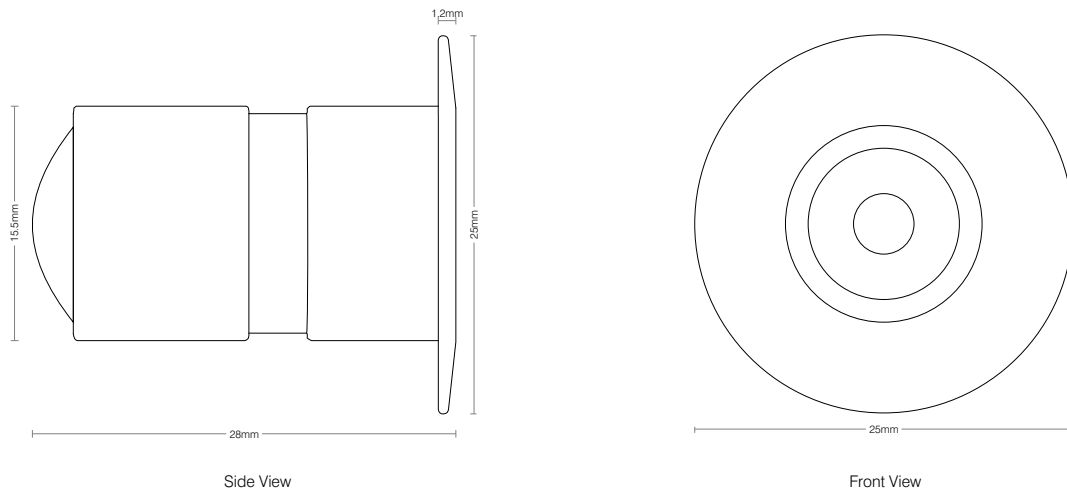

Ordering Codes

QUICK SPEC			
FFE-STB	C	CD2	10
Version	Window	Cable	Length
FFE-STB StarBurst	C Clear F Frosted	CD1 Cord 1.0 CD2 Cord 2.0 E48 End fibre 265/48 E64 End fibre 265/64 E32 End fibre 500/32 E12 End fibre 750/12	5 5m 10 10m 15 15m 20 20m XX Custom (Specify)



NOTE: StarBurst is proudly designed by Digilin engineers and manufactured to order in our Brisbane facility



LED Lighting
Fibre Optic Lighting
Lighting Control
Electronic Engineers



1800 950 888
+617 3899 1267
info@digilin.com.au
www.digilin.com.au