

LITEFLEX

Compact LED Strip
840 Lumens Per Metre



High output strip in poly-carbonate fixing track

LiteFlex takes our LED strip system, and assembles it into very small, economical and flexible fixing track.

Perfect for lighting pelmets and coffers, and for cabinetry situations where high output is needed from a compact form factor.


Also available as MarinerFlex, where a Shield 65 treatment is applied for use in outdoor applications



SPECIFICATIONS

| Colours | Warm | Neutral | Cool | Red | Green | Blue |
|------------------------|--|---------|-------|-----------|-----------|-----------|
| Wavelength/Colour Temp | 3050K | 4100K | 6000K | 620-630nm | 520-535nm | 465-475nm |
| Lumens per Metre | 720 | 780 | 840 | 192 | 432 | 96 |
| Typical CRI | 80 | 80 | 75 | — | | |
| LED Spacing | 8.33mm | | | | | |
| Cut Off Length | 50mm | | | | | |
| Beam Angle | 110° | | | | | |
| Performance | 70% Lumen Maintenance @ 50,000 Hours (L70) | | | | | |
| Voltage | 24VDC | | | | | |
| Current | 360 mA per metre | | | | | |
| Power | 8.64w per metre | | | | | |
| IP Rating | IP20 (IP65 For MarinerFlex) | | | | | |

ORDERING CODES

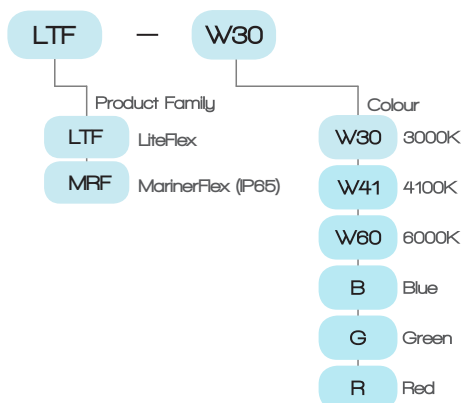

DIMENSIONS

