

ICON 800 Series

Adjustable LED Downlight

504 - 983 Lumens



ICON 800 SERIES

DIGILIN


Adjustable LED Downlight

504 – 983 Lumens

The original LED downlight from Digilin

The first Australian LED downlight to offer light output comparable to 50w halogen. This pioneering fixture is still Australian made and available with a range of accessories.

Excellent for general lighting purposes in commercial or residential projects. Adjustable head provides 28 degree tilt, allowing smooth wall washing or soft spotting.

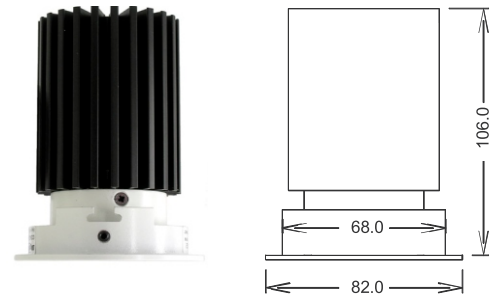

SPECIFICATIONS

Version	ICON 808				ICON 812				ICON 816			
Colours	Warm	Neutral	Neutral	Cool	Warm	Neutral	Neutral	Cool	Warm	Neutral	Neutral	Cool
Colour Temperature	3000K	3500K	4000K	5000K	3000K	3500K	4000K	5000K	3000K	3500K	4000K	5000K
Luminaire Lumens @ 60° Beam	504	507	510	555	789	793	798	862	901	908	914	983
Typical CRI	85											
MacAdams Ellipse	3 SDCM/MacAdam Steps											
Beam Option	22°, 36°, 60°											
Performance	70% Lumen Maintenance @ 50,000 Hrs (L70)											
Luminaire Power	7.4w (350mA @ 21V Nominal)				11w (500mA @ 22V Nominal)				16w (700mA @ 23.1V Nominal)			
Connected Load	9.9w				13.5w				18.2w			
IP Rating	IP40											
Material & Finish	Heat Sink - Extruded Aluminium, Bezel & Body - Cast Aluminium											
	White, Black (Custom Colour on Request)											
Power Supply	Mains Dim: LPC-26350-MD DALI Dim: LPC-LCAI-30350				Mains Dim: LPC-26500-MD DALI Dim: LPC-LCAI-30500				Mains Dim: LPC-26700-MD DALI Dim: LPC-LCAI-30700			
Power Factor	>0.9											
Weight	400g											
Hole Cut Out	70mm Dia											

ACCESSORIES



Surface Mount Enclosure



Small Glare Ring



Large Glare Ring



Black Powder Coat



White Powder Coat

ORDERING CODES

