


PROJEKTOR

LED Flood/Spot 14W - 60W
868 - 4291 Lumens

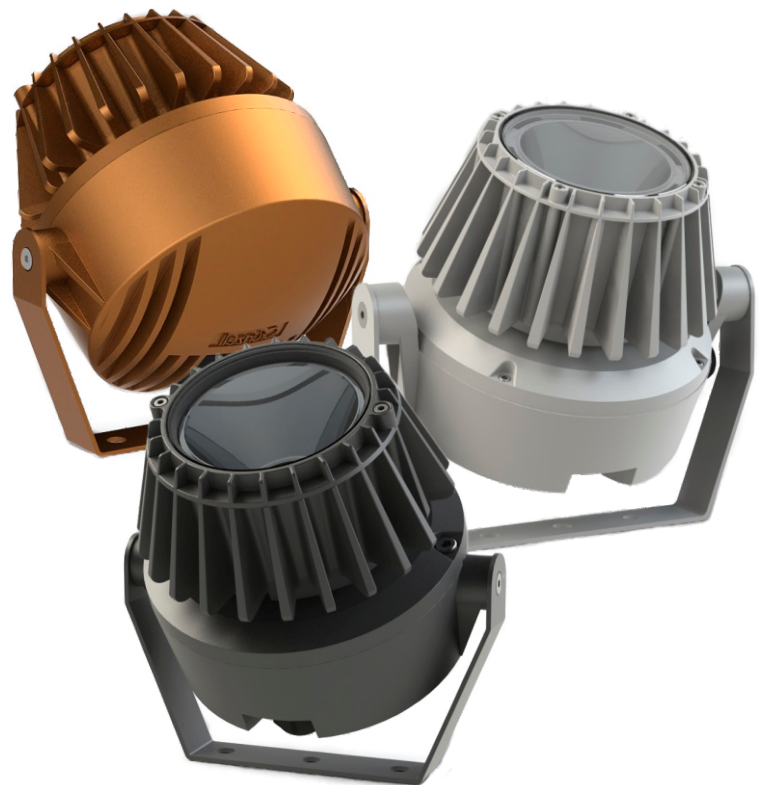

PROJEKTOR

LED Flood/Spot 14w - 60w

868 - 4291 Lumens

DIGILIN

Architectural High Performance LED Projector

The Projektor is an architectural IP65 rated luminaire that is suitable for both exterior use as well as for large public interior applications. The compact design makes it perfect for building facades, landscaping, entrances, security areas, terraces and gardens.


The luminaire is constructed with the LED driver compartment with built in (IP67) driver thermally separated in a surface powder coated corrosion resistant die cast aluminium housing.



SPECIFICATIONS

Model	B218-14	B218-25	B228-35	B228-60
Colours	2700K, 3000K, 3500K, 4000K, 5000K			
Luminaire Lumens	868	1773	2504	4291
Typical CRI	80			
Beam Options	18°, 30°, 55°, 73°		15°, 23°, 46°	
Performance	70% Lumen Maintenance @ 50,000 Hours (L70)			
Luminaire Power	14w	25w	35w	60w
IP Rating	IP 65			
Material & Finish	Powder Coated Die Cast Aluminium			
Colours	White, Black, Silver/Grey			
Power Supply	Voltage 100-270V (50/60Hz)			
Reflector	Highly specular aluminium coated PC			
Weight	1.5kg		4.2kg	

DIMENSIONS

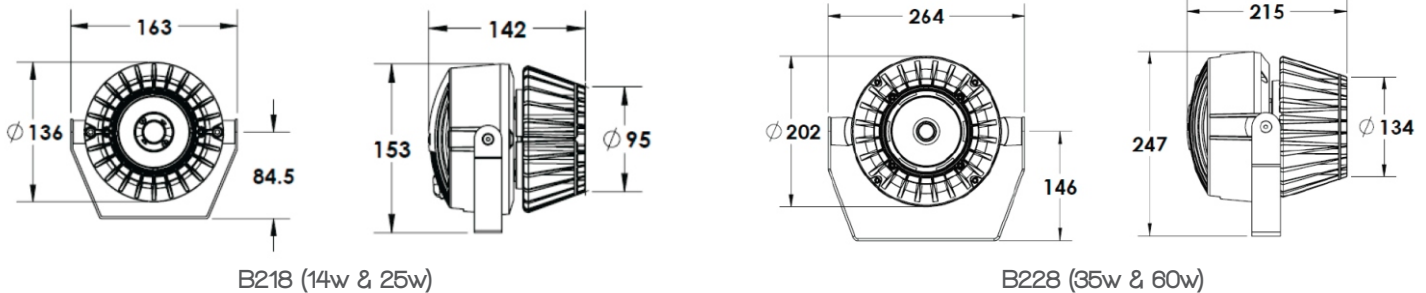

ORDERING CODES

