


Corner

Corner systems for coves, cabinetry & backlighting

Product Code: CNR

Specially designed for cove and backlighting applications, Cove linear systems use compact, surface mount profiles with curved or squared diffusers to output light in a 90-degree range. Opal diffusers create a dot-free finish and are recommended for direct-view applications, while clear and frosted diffusers enable higher efficiency light delivery for situations where the fixtures will not be directly seen.

All Digilin linear systems are manufactured in Australia to custom project lengths and supplied with factory-fitted connectors using Digilin's chemical anchoring process for super durability and ease of installation. The system can undergo Digilin's shield exterior coating service to upgrade its protection to an IP65 rating for outdoor applications.

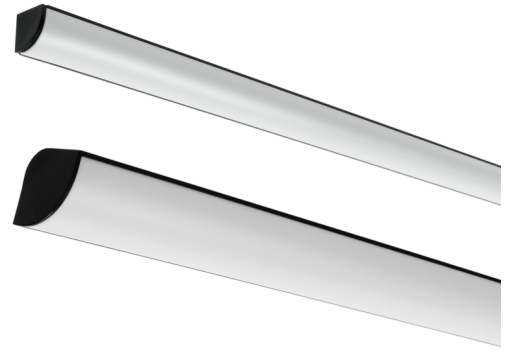

Colour	White	Tuneable White	RGB	RGBW
CCT/Wavelength	2700K, 3000K, 4000K	2700K-5700K	625nm (Red) 530nm (Green) 470nm (Blue)	625nm (Red) 530nm (Green) 470nm (Blue) 3000K (White)
LED Lumens	900-3300lm/m	1210-1310lm/m	600lm/m	1300m/m
Power	7-26W/m	20.4W/m	21.6W/m	17.7W/m
Input Current	275-1055mA/m	850mA/m	900mA/m	740mA/m
Typical CRI	90	90	□	90
Performance	L80(10k)>60,000hrs	L70 (10k) >60,000hrs	L90 (6k) >36,000hrs	L80 (10k) >60,000hrs
Input Voltage	24VDC			
Body Width	16mm, 30mm			
Mounting	Surface Mount			
Beam Option	Opal Diffuser, Frost Diffuser, Clear Cover			
Finish Colour	Natural Anodised Aluminium, White, Black, Custom			
Control	Mains/Phase, DALI, Smooth DALI, DMX, Non-Dim			
Driver Placement	Remote			
Build Material	Extruded Aluminium			
Luminaire IP Rating	IP20			
LED Module IP Rating	IP20 (IP44 & IP65 available)			
Dimensions	16mm version: 16mm (width), 16mm (height) / 30mm version: 30mm (width), 30mm (height)			

