



To compliment the HaloFlex range of flexible, durable IP68 linear systems, a range of mounting options are available which provide mounting solutions for all installation types. The range includes serrated, non-serrated, flexible and rigid as well as a mounting clips for challenging locations. Each mounting profile is designed to ensure secure installation of the HaloFlex system on site.



Serrated Aluminium
Surface Mount (Rigid)

Refer Page 2




Serrated Aluminium
Surface Mount (Flexible)

Refer Page 3



Serrated Aluminium
Recessed Mount (Rigid)

Refer Page 4

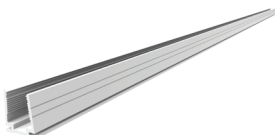

Standard Aluminium
Surface Mount (Rigid)

Refer Page 5



Transparent Plastic
Surface Mount (Rigid)

Refer Page 6





Aluminium & Plastic
Surface Mount (Rigid)

Refer Page 7


Serrated Aluminium - Surface Mount (Rigid)




Used for upside down or long vertical runs.
For use with both side lit and front lit HaloFlex.

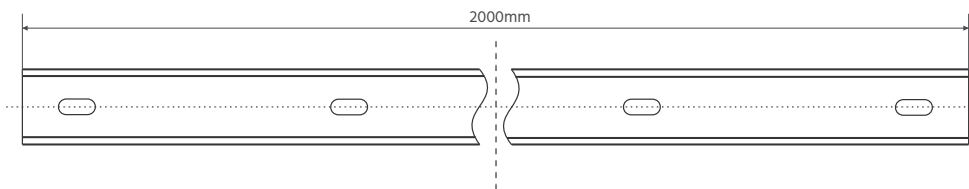



Product	Standard Length	Slotted Hole	Hole Number
HFL-MPF-SFC-SRA-0020	20mm	4mm x 10mm	1
HFL-MPF-SFC-SRA-2000	2000mm	4mm x 10mm	10



Serrated Aluminium - Surface Mount (Flexible)

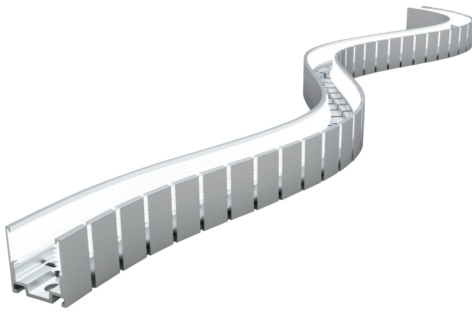

Used for upside down or long vertical runs.
Suitable for use with side lit only.


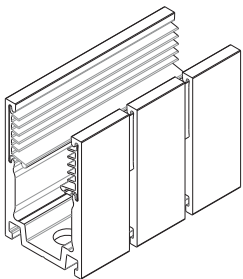
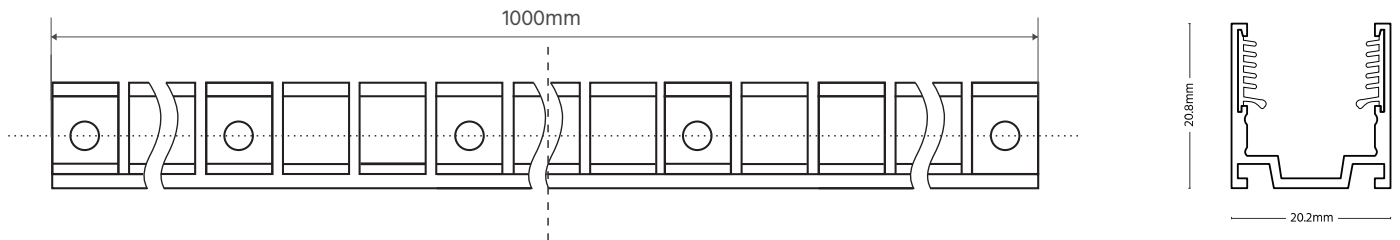


Product	Standard Length	Screw Hole	Hole Number
HFL-MPF-SFF-SRA-1000	1000mm	Ø4.2mm	10

Serrated Aluminium - Recessed Mount (Rigid)




Used for upside down or long vertical runs.
For use with both side lit and front lit HaloFlex.

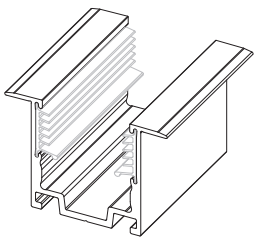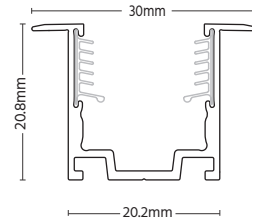
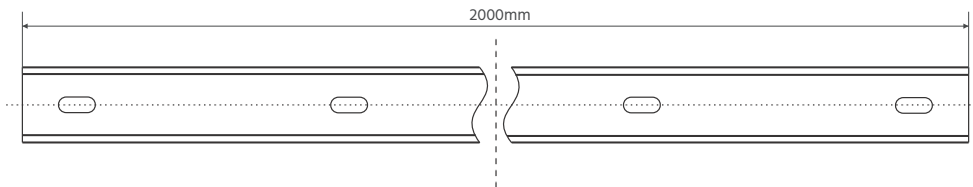


Product	Standard Length	Screw Hole	Hole Number
HFL-MPF-REC-SRA-0020	20mm	4mm x 10mm	1
HFL-MPF-REC-SRA-2000	2000mm	4mm x 10mm	10

Standard Aluminium - Surface Mount (Rigid)

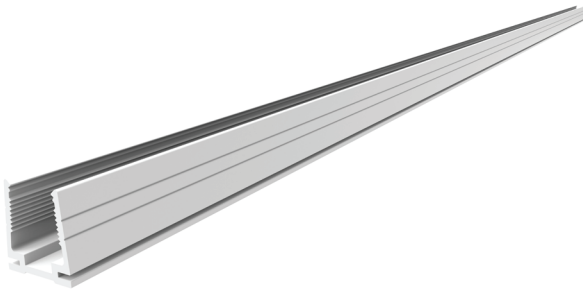

Not recommended for upside down or long vertical runs.
For use with both side lit and front lit HaloFlex.



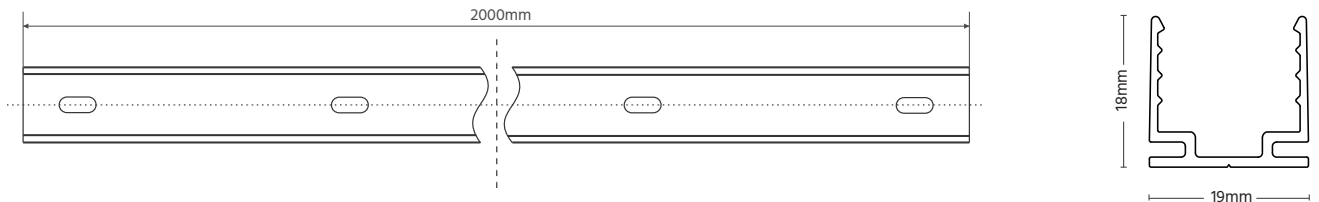


Product	Standard Length	Screw Hole	Hole Number
HFL-MPF-SFC-STA-0035	35mm	4mm x 10mm	1
HFL-MPF-SFC-STA-2000	2000mm	4mm x 10mm	10

Transparent Plastic - Surface Mount (Rigid)



Not recommended for upside down or long vertical runs.
For use with both side lit and front lit HaloFlex.

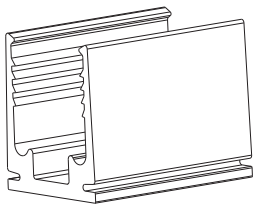

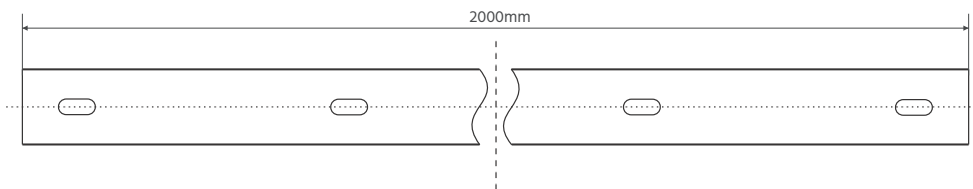


Product	Standard Length	L1	L2	Slotted Hole	Hole Number
HFL-MPF-SFC-TPL-035	35mm	17.5mm	-	4.5mm x 8mm	1
HFL-MPF-SFC-TPL-2000	2000mm	100mm	200mm	4.5mm x 8mm	10

Aluminium & Plastic - Surface Mount (Rigid)



Not recommended for upside down or long vertical runs.
For use with both side lit and front lit HaloFlex.

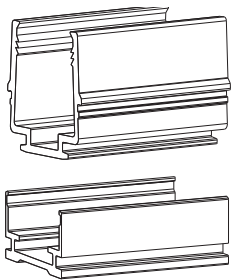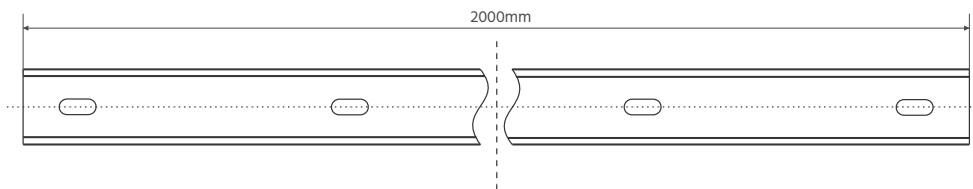

Product	Standard Length	Screw Hole	Hole Number
HFL-MPF-SFC-APC-0035	35mm	4mm x 10mm	1
HFL-MPF-SFC-APC-2000	2000mm	4mm x 10mm	10

For technical information or support, call us on +617 3899 1267 or refer to www.digilin.com.au.