



To compliment the HaloFlex range of flexible, durable IP68 linear systems, a range of mounting options are available which provide mounting solutions for all installation types. The range includes serrated, non-serrated, flexible and rigid as well as a mounting clips for challenging locations. Each mounting profile is designed to ensure secure installation of the HaloFlex system on site.



Bendable Silicone Surface Mount (Flexible)

Refer Page 2



Serrated Aluminium Surface Mount (Rigid)

Refer Page 3



Serrated Aluminium Surface Mount (Flexible)

Refer Page 4



Serrated Aluminium Recessed Mount (Rigid)

Refer Page 6



Standard Aluminium Surface Mount (Rigid)

Refer Page 7



Transparent Plastic Surface Mount (Rigid)


Refer Page 8




Bendable Silicone - Surface Mount (Flexible)



Fully encapsulated in UL certified silicone, it excels in UV, weather, and corrosion resistance, making it suitable for underwater, high and low temperature environments. Bends both horizontally and vertically. Suitable for hanging upside down. Available in white or black as standard or custom colours. For use with both side lit and front lit HaloFlex.





Product	Standard Length	Slotted Hole	Hole Number	Finish Colour
HFL-MPF-SFF-SIL-WHT-0055	55mm	Ø3mm	2	White
HFL-MPF-SFF-SIL-WHT-0200	200mm	Ø3mm	3	White
HFL-MPF-SFF-SIL-WHT-1000	1000mm	Ø3mm	14	White
HFL-MPF-SFF-SIL-BLK-0055	55mm	Ø3mm	2	Black
HFL-MPF-SFF-SIL-BLK-0200	200mm	Ø3mm	3	Black
HFL-MPF-SFF-SIL-BLK-1000	1000mm	Ø3mm	14	Black







Serrated Aluminium - Surface Mount (Rigid)



Used for upside down or long vertical runs. For use with both side lit and front lit HaloFlex.






Product	Standard Length Slotted Hole		Hole Number	
HFL-MPF-SFC-SRA-0020	20mm	4mm x 10mm	1	
HFL-MPF-SFC-SRA-2000	2000mm	4mm x 10mm	10	







Serrated Aluminium - Surface Mount (Flexible)



Used for upside down or long vertical runs. Suitable for use with side lit only.

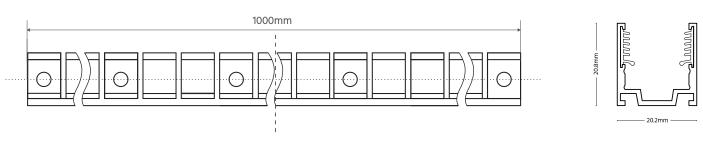

Product	Standard Length	Screw Hole	Hole Number	
HFL-MPF-SFF-SRA-1000	1000mm	Ø4.2mm	10	






Adjustable Mounting Bracket



Suitable for use with HaloFlex Surface Mount Serrated Aluminum Profiles. Lockable at 30° intervals. 180° range. Anodised aluminium build.

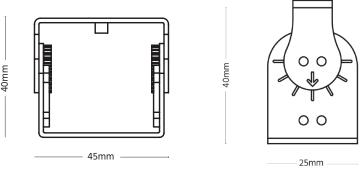


Product Standard Length		Slotted Hole	Hole Number	
HFL-AMC SFC-SRA	-	-	-	




Serrated Aluminium - Recessed Mount (Rigid)



Used for upside down or long vertical runs. For use with both side lit and front lit HaloFlex.







Product	Standard Length	Screw Hole	Hole Number	
HFL-MPF-REC-SRA-2000 2000mm		4mm x 10mm	10	




Standard Aluminium - Surface Mount (Rigid)




Not recommended for upside down or long vertical runs. For use with both side lit and front lit HaloFlex.





Product	uct Standard Length		Hole Number	
HFL-MPF-SFC-STA-0035	35mm	4mm x 10mm	1	
HFL-MPF-SFC-STA-2000	2000mm	4mm x 10mm	10	







Transparent Plastic - Surface Mount (Rigid)



Not recommended for upside down or long vertical runs. For use with both side lit and front lit HaloFlex.





Product	Standard Length	L1	L2	Slotted Hole	Hole Number
HFL-MPF-SFC-TPL-035	35mm	17.5mm	-	4.5mm x 8mm	1
HFL-MPF-SFC-TPL-2000	2000mm	100mm	200mm	4.5mm x 8mm	10

