

SIGMA

LED Linear High-Bay 53W - 265W
6380 - 31800 Lumens



Economical LED Linear High-Bay

An easy option for industrial, warehousing and commercial projects. The Sigma combines high light output with superior optics to deliver the light where you need it. Using the latest in LED and optical technology, the Sigma range boasts superior quality and performance.




SPECIFICATIONS

| Model | SGM-53 | SGM-105 | SGM-160 | SGM-210 | SGM-265 |
|--------------------|--|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Colours | 3000K, 4000K, 5000K, 6500K | | | | |
| Luminaire Lumens | 6380 | 12800 | 19200 | 25200 | 31800 |
| Typical CRI | 80 (CRI 90 Available) | | | | |
| Beam Options | 60°, 90°, 100° x 20° | | | | |
| Performance | 70% Lumen Maintenance @ 50,000 Hrs (L70) | | | | |
| Luminaire Power | 50w | 100w | 152w | 200w | 252w |
| Connected Load | 53w | 105w | 160w | 210w | 265w |
| IP Rating | IP65 | | | | |
| Material & Finish | Anodised Aluminium | | | | |
| Power Factor | > 0.95 | | | | |
| Weight | 3.5kg | 4.2kg | 5.5kg | 7.7kg | 8.7kg |
| Dimensions (mm) | L 303mm W 208mm H 140mm | L 425mm W 208mm H 140mm | L 607mm W 208mm H 140mm | L 789mm W 208mm H 140mm | L 971mm W 208mm H 140mm |
| Dimming | 1-10v, DALI, Zigbee | | | | |
| Cable Length | 300mm Cable (default) | | | | |
| Cable/Plug Options | 1000mm Cable, 1000mm cable & plug | | | | |

NOTE- Sigma range is manufactured to Digilin specifications by an international partner

DIMENSIONS

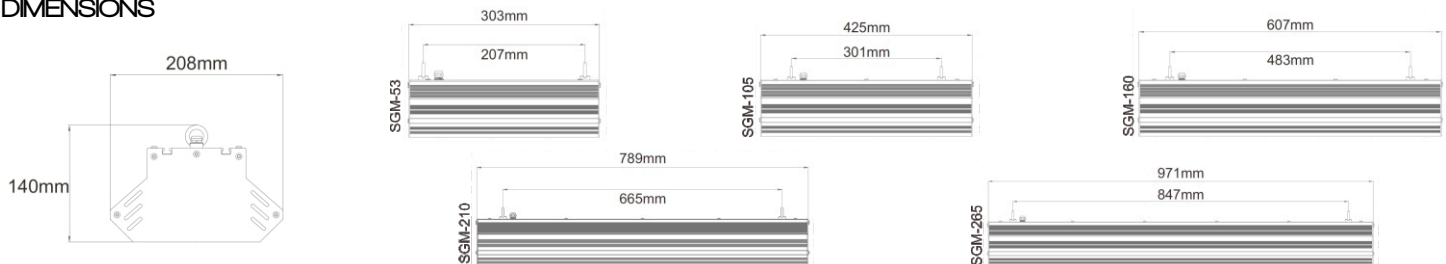

ORDERING CODES

