

# EXCALIBUR RGBW

RGBW Linear Flood  
1317 - 3428 Lumens



# EXCALIBUR RGBW

DIGILIN

RGBW Linear Flood  
1317 - 3428 Lumens

## Powerful beam with multiple lens options

Use for exterior building illumination where the superior optics of Excalibur deliver smooth colour mixing.

Integral power supply and addressable DMX on-board, this high power flood is ready to plug & play.




## SPECIFICATIONS

Colours		Red	Green	Blue	Neutral White	Warm White	Combined
Wavelength/Colour Temp		620 - 630nm	520 - 535nm	465 - 475nm	4000K	3000K	-
Lumens per Metre RGB/Neutral	600mm	279	450	162	480	-	1371
	900mm	419	675	243	720	-	2057
	1200mm	558	900	324	960	-	2742
	1500mm	698	1125	405	1200	-	3428
Lumens per Metre RGB/Warm	600mm	279	450	162	-	428	1317
	900mm	419	675	243	-	639	1976
	1200mm	558	900	324	-	852	2634
	1500mm	698	1125	405	-	1065	3293
Beam Angle	11° 13° 30° 47° 66° 72° 40°x13°						
Performance	70% Lumen Maintenance @ 50,000 Hours (L70)						
IP Rating	IP65						

Version	600mm	900mm	1200mm	1500mm
Power RGBW	27w	38w	51w	62w
Weight	3.6kg	4.9kg	6.25kg	7.57kg
Material & Finish	Housing - Cast Aluminium, Window - Toughened Glass			
Power Supply	120-277V +/- 10% 50/60Hz			
Dimming	DALI, DMX			
Power Factor	0.9			

## ORDERING CODES

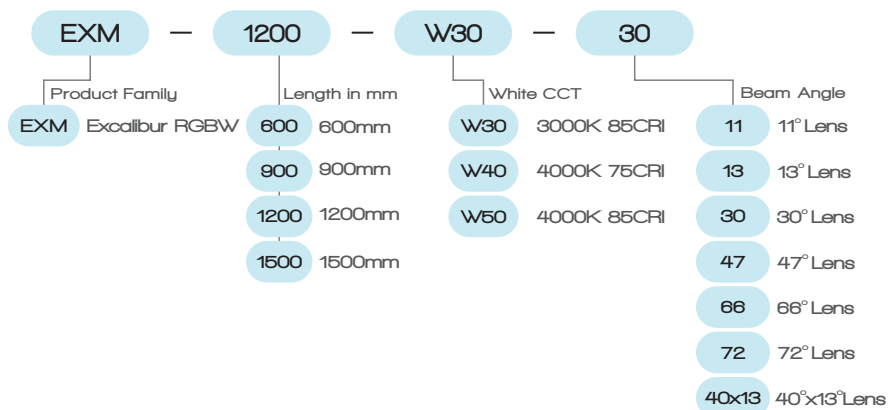

## DIMENSIONS

