


MISSION LED

High Output LED Strip
2498 Lumens Per Metre

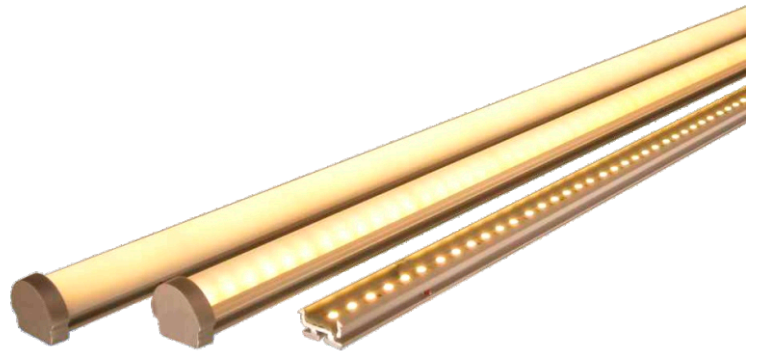

MISSION LED

Hi Output LED Strip


2498 Lumens Per Metre

DIGILIN

Super high output, fully featured with heatsink and multiple lens options

Over 2000 lumens per metre from this compact linear LED system. Tight LED spacing allows spot free illumination in extrusions with opal diffusers.

A multi-purpose LED strip system suitable for use in coffers, bulkheads, signs, building lineation or for task lighting.

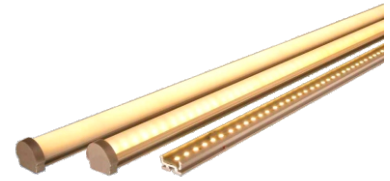


SPECIFICATIONS

Colours	Warm White	Warm White	Neutral White	Cool White
Colour Temp	2800K	3000K	4000K	5000K
Lumens per Metre	2348	2402	2451	2498
Typical CRI	80 (95 by special order)			
LED Spacing	4.21mm			
Cut Off Length	40mm			
Beam Angle	120°			
Performance	70% Lumen Maintenance @ 50,000 Hours (L70)			
Voltage	24VDC			
Current	1000 mA per metre			
Power	24w per metre			
IP Rating	IP40, (Shield IP44, IP54, IP65 Available)			
Installation	Assembled to length, mounting clips included			
Connection	Factory fitted connectors included			


EXTRUSION

Covers & Lenses	Nil	Clear	Frosted	Opal	Frosted 15°	Frosted 30°	Frosted 60°	Frosted 90°
LOR	100%	94%	89%	61%	88%	88%	88%	94%
Max Length	2000mm Single Piece (Unlimited Total Run Length)							
Material & Finish	Extruded Aluminium							

ORDERING CODES

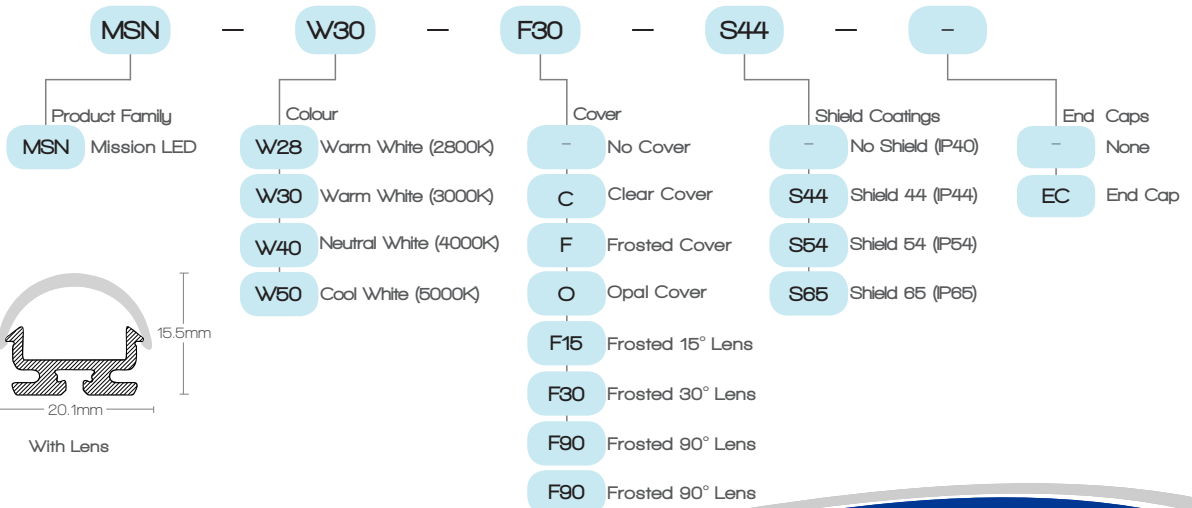

DIMENSIONS

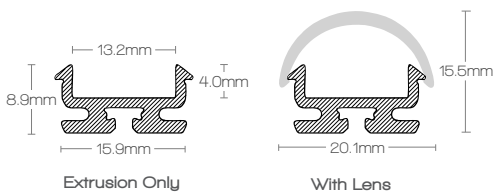

1800 950 888

37 Oxford St Bulimba, QLD 4171

1800 982 005

www.digilin.com.au

DIGILIN

Manufactured In Australia for over 35 years