


PROJECT LED

High Output LED Strip
840 Lumens Per Metre

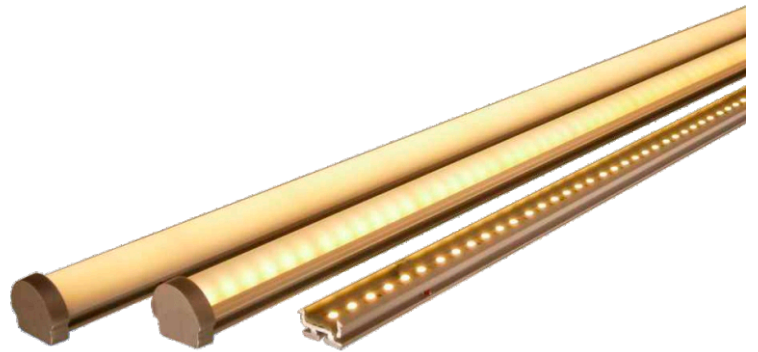

PROJECT LED

High Output LED Strip
840 Lumens Per Metre

DIGILIN

Fully featured with heatsink and multiple lens options

Australia's most popular LED strip, Project LED is the choice of professionals. Guaranteed to deliver exceptional performance and reliability

Use in coffers, bulkheads, signs, building lineation or for task lighting where long run lengths are required. Weatherproof version available.




SPECIFICATIONS

| Colours | Warm | Neutral | Cool | Red | Green | Blue |
|------------------------|--|---------|-------|-----------|-----------|-----------|
| Wavelength/Colour Temp | 3050K | 4100K | 6000K | 620-630nm | 520-535nm | 465-475nm |
| Lumens per Metre | 720 | 780 | 840 | 192 | 432 | 96 |
| Typical CRI | 80 | 80 | 75 | — | | |
| LED Spacing | 8.33mm | | | | | |
| Cut Off Length | 50mm | | | | | |
| Beam Angle | 110° | | | | | |
| Performance | 70% Lumen Maintenance @ 50,000 Hours (L70) | | | | | |
| Voltage | 24VDC | | | | | |
| Current | 360 mA per metre | | | | | |
| Power | 8.64w per metre | | | | | |
| IP Rating | IP40, (Shield IP44, IP54, IP65 Available) | | | | | |
| Installation | Assembled to length, mounting clips included | | | | | |
| Connection | Factory fitted connectors included | | | | | |

EXTRUSION

| Covers & Lenses | Nil | Clear | Frosted | Opal | Frosted 15° | Frosted 30° | Frosted 60° | Frosted 90° |
|-------------------|--|-------|---------|------|-------------|-------------|-------------|-------------|
| LOR | 100% | 94% | 89% | 61% | 88% | 88% | 88% | 94% |
| Max Length | 2000mm Single Piece (Unlimited Total Run Length) | | | | | | | |
| Material & Finish | Extruded Aluminium | | | | | | | |

ORDERING CODES

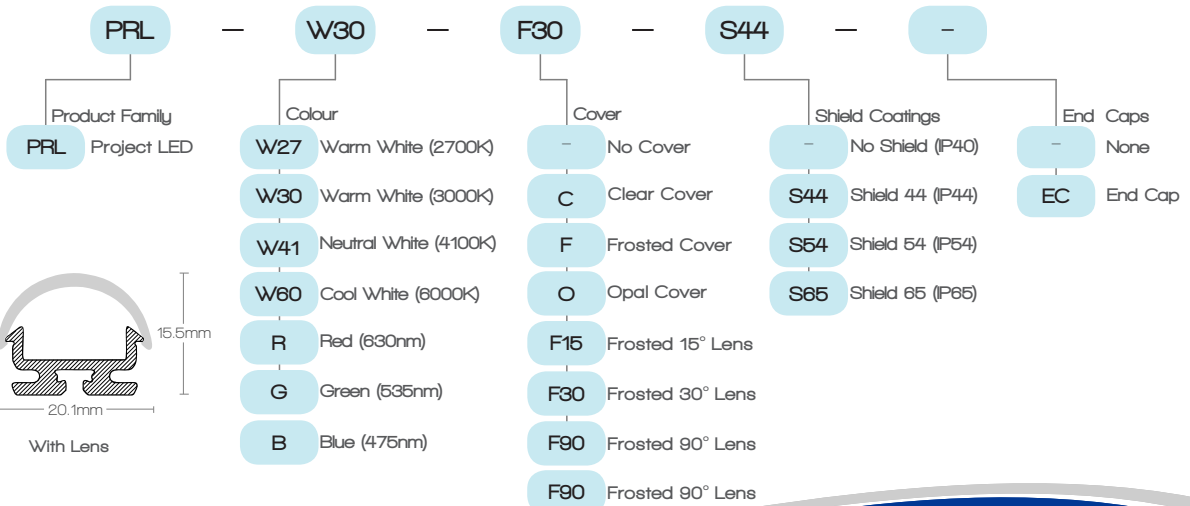

DIMENSIONS

